




© Copyright 2008. Black Box Corporation. All rights reserved.

1000 Park Drive • Lawrence, PA 15055-1018 • 724-746-5500 • Fax 724-746-0746



Low-Profile Secure Wallmount Cabinet

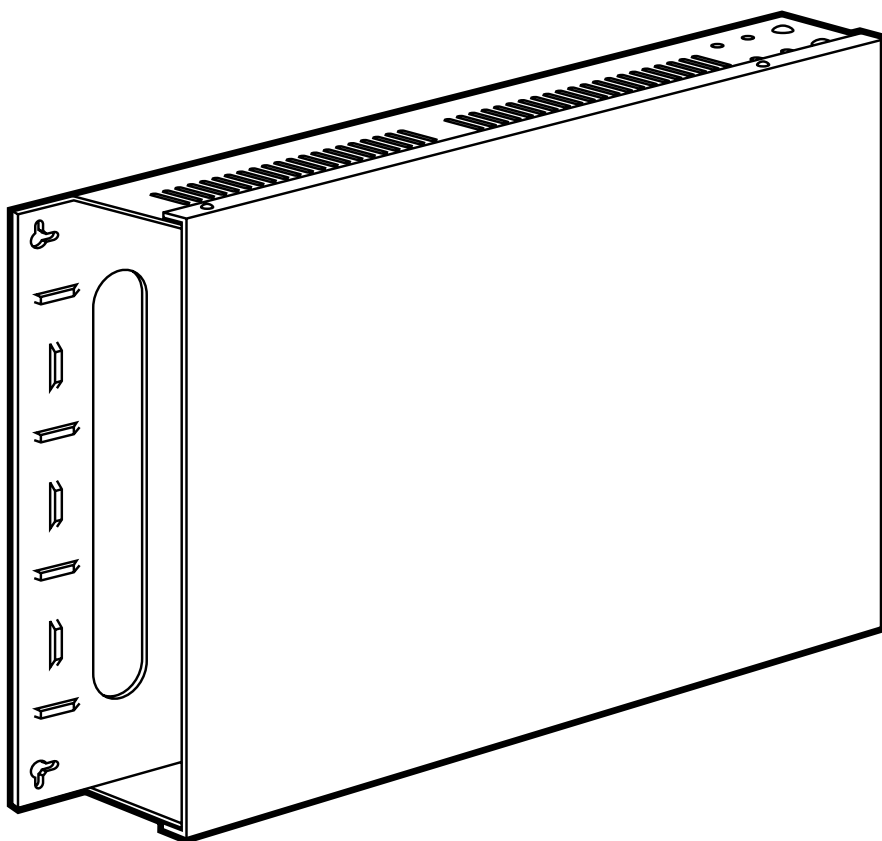

**CUSTOMER
SUPPORT
INFORMATION**

Order **toll-free** in the U.S.: Call **877-877-BBOX** (outside U.S. call **724-746-5500**)
FREE technical support 24 hours a day, 7 days a week: Call **724-746-5500** or fax **724-746-0746**
Mailing address: **Black Box Corporation**, 1000 Park Drive, Lawrence, PA 15055-1018
Web site: www.blackbox.com • E-mail: info@blackbox.com

TRADEMARKS USED IN THIS MANUAL

BLACK BOX and the Double Diamond logo are registered trademarks of BB Technologies, Inc.

Any other trademarks mentioned in this manual are acknowledged to be the property of the trademark owners.

Specifications

Weight Capacity: RMT355A-R2: 50 lb. (127 kg);
RMT356A-R2: 40 lb. (101.6 cm)

Overall Height: RMT355A-R2: 3.92" (9.9 cm);
RMT356A-R2: 7.42" (18.8 cm)

Racking Height: RMT355A-R2: 3.5" (2U);
RMT356A-R2: 7" (4U)

Overview

The Low-Profile Secure Wallmount Cabinet enables you to mount hubs and other network components against the wall or under tables or desks.

The cabinet is constructed of 16-gauge steel with a durable, black powder-coat finish. It includes a steel top cover and multiple cable lacing points in the rear. Choose from two racking heights: 2U and 4U. The cabinet includes pre-installed, 11-gauge, 10-32 threaded rackrails with three positions for cable managers or flush equipment mounting.

What's Included

- (1) Low-Profile Secure Wallmount Cabinet
- (8) 10-32 screws (used for mounting equipment)
- This user's manual

LOW-PROFILE SECURE WALLMOUNT CABINET

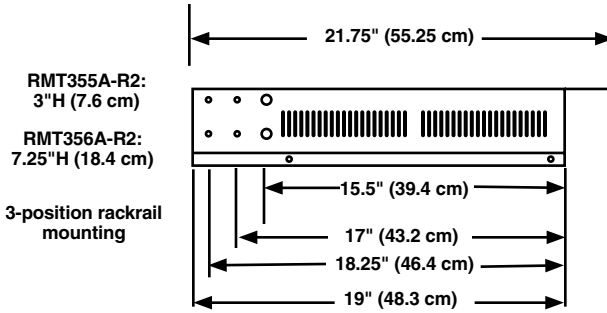


Figure 1. Side view.


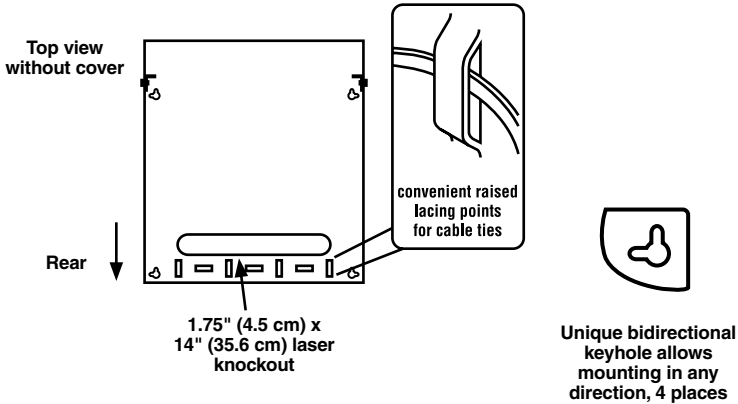


Figure 2. Top view without cover.

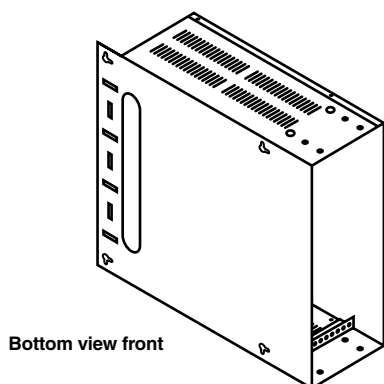

Bottom view front

Figure 3. Bottom view, front.

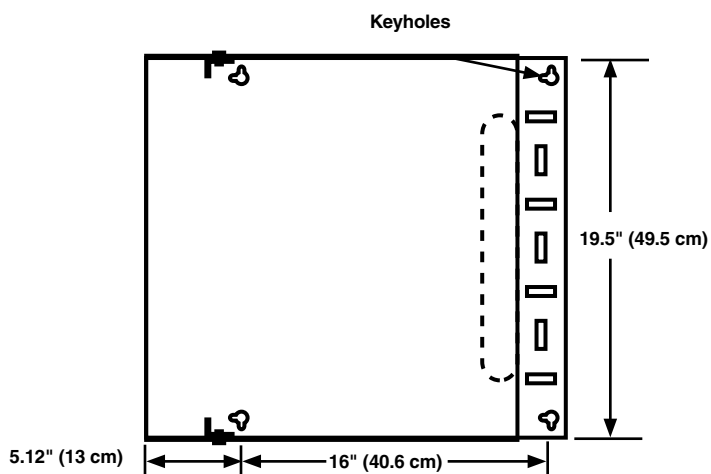


Figure 4. Top view with cover.

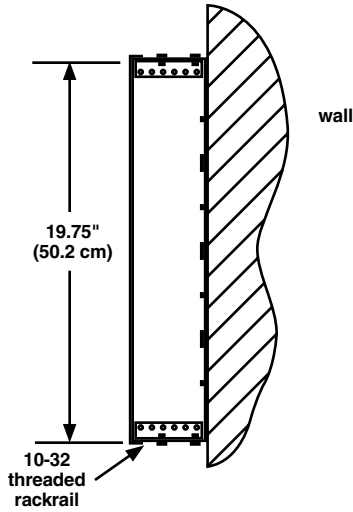


Figure 5. Front view, shown wallmounted.

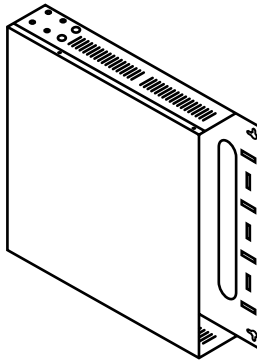


Figure 6. Top view, rear.